

Package Contents:
HM009B – Taxi Headrest Mount


Compatible with headrests having a 2-post configuration.

TOOLS: 10mm socket wrench

1 Separate the clamp bracket, and place on 2-post headrest.



2 Use a 10mm socket wrench to tighten the bolts.

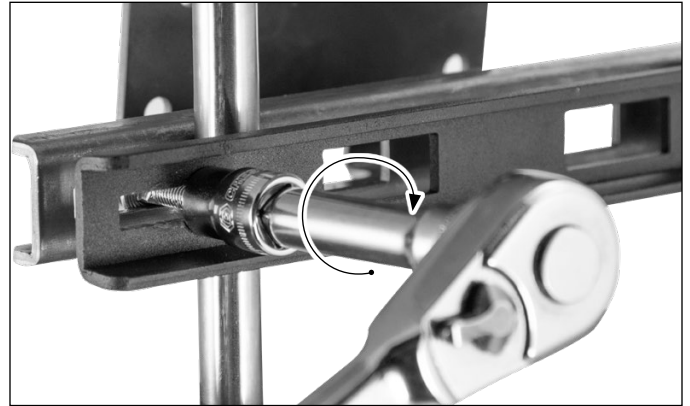

3 Attach any AMPS-compatible device (tablet, mobile printer, payment terminal; not included, sold separately) with screws and bolts.



! Safety Precautions
Arkon is not responsible for any damages caused to your vehicle, your device, your passengers, or yourself due to the installation or use of this mount.

ARKON MOUNTS

Consumer Hotline:
USA (800) 841-0884
INT'L (626) 254-9005
Monday - Friday 9am - 5pm, PST

www.arkon.com
Arcadia, CA 91006 USA
Designed in USA | Made in USA
© Copyright 2020 Arkon Resources, Inc.