





Package Contents:

- (1) **SP25MM17** – 25mm Ball to 17mm Ball Adapter
- (2) **SPRM080** – Heavy-Duty Sticky Suction Base with 25mm Ball
- (2) **SP-RMS250** – Robust Series 2.75 inch Composite Mount Shaft
- (1) **APT325MM** – Triple 25mm (1 inch) Ball Adapter
- (1) **SP-RM250** – Robust Series 3.75 inch Composite Mount Shaft

- 1 Connect the **SP25MM17** and **APT325MM** to the Robust mount shaft **SP-RM250** by loosening adjustment knob to adjust position. Retighten to set.

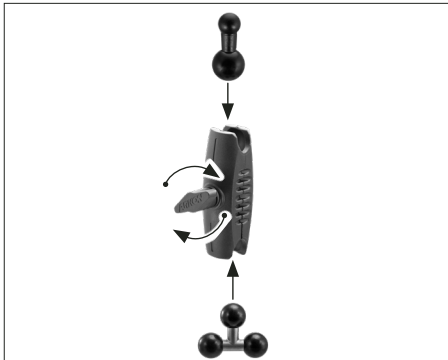

- 2 Connect the **APT325MM** to the Robust mount shaft **SP-RMS250** by loosening adjustment knob to adjust position. Retighten to set.

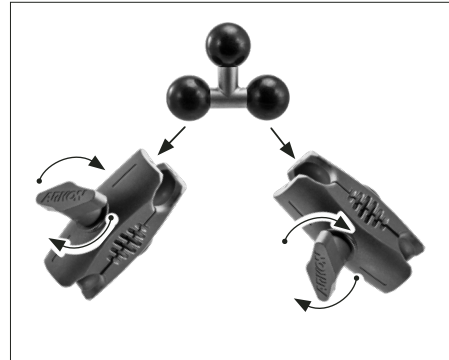

- 3 Attach Robust mount shaft **SP-RMS250** to **SPRM080** by loosening adjustment knob to adjust position. Retighten to set.



- 4 Locate a safe flat surface on the dash or windshield to mount the suction cup **SPRM080**. Clean the surface with the alcohol pad provided, then let it dry. Push the suction cup base firmly to the surface. Flip the lever down to secure the suction cup.



Safety Precautions

Do not install Arkon products over an air bag cover or within the air bag deployment zone. Arkon Resources, Inc. assumes no responsibility of liability for injury or death as a result of car crashes and / or air bag deployment.

Arkon is not responsible for any damages caused to your vehicle, your device, or yourself due to the installation or use of this mount.

ARKON MOUNTS

Consumer Hotline:

USA (800) 841-0884

INT'L (626) 254-9005

Monday - Friday 9 am - 5 pm, PST

www.arkon.com

Arcadia, CA 91006 USA

Designed in USA | Made in Taiwan and USA

© Copyright 2022 Arkon Resources, Inc.