

Included Components:

- A. 3x Slim-Grip® Ultra Pro Tablet Holder with Support Legs (TAB006XL)**
- B. 1x 20mm Ball to Dual-T Adapter (APBALL2T)**
- C. 1x Weighted Base (SPHD8BASE)**
- D. 1x Remarkable Creator™ Pole (SPHD8L29)**
- E. 1x Clamp Base (SPHD8L29CLAMP)**
- F. 2x Clamp Base with 22mm Ball (GN03122)**
- G. 2x 22mm Swivel Tightening Ring (SP-SB-RING-22)**
- H. 2x Dual T-Tab to 22mm Ball Adapter (SP-SB-2T-22)**

Tablet Size Approx.	Recommended Leg Combination
6.37" – 8.81"	2 Small Legs
7.12" – 9.25"	1 Long Leg + 1 Small Leg
7.62" – 10"	2 Long Legs
8.75" – 11.12"	1 Long Leg + 1 Extra-Long Leg

Important: Clean the application surface and make sure it is free of dirt, dust, and grease before installation.


If you need a replacement part, please refer to the **SKU** options below:

- **Tablet Holder Support Legs:** SPTAB6FT
- **Rubber Cover for the Clamp:** SPCLAMPVCVR

Based on your preferred base, please follow the steps outlined below.


- 1

Install the Pole in the Base
 Place the pole in the base by utilizing the alley key included with the base and turn it clockwise to secure it in place.

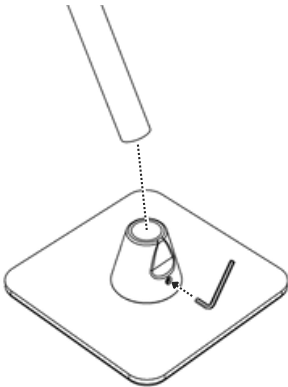


- 2

Attaching the Adapter to the Pole
 Insert the 20mm ball adapter pole by loosening the knob and then retightening for a secure fit.

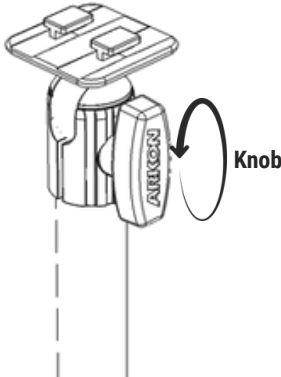


- 1

Align and Adjust the Clamp Width
 Position the clamp on the edge of the surface where you want to mount the system. The multi-hole design allows compatibility with a wide range of surfaces and setups.

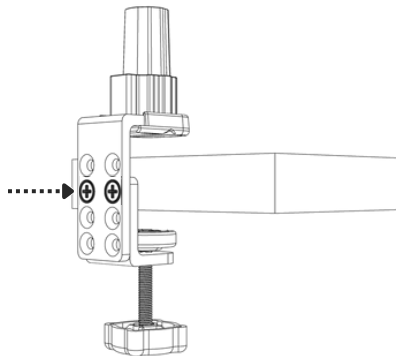

- 2

Secure the Clamp
 Rotate the adjustment knob to open the clamp. Tighten the adjustment knob until the clamp is firmly secured to the surface. The durable clamp mechanism ensures your setup stays stable.

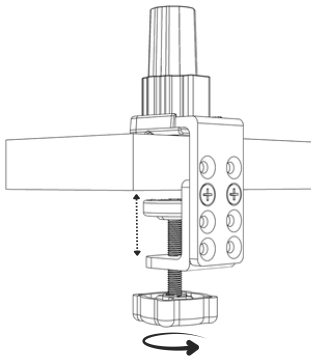

WARNING
 CHOKING HAZARD - Keep out of reach from children under 8 yrs. as they can choke or suffocate on parts included with this system

WARNING
 Arkon® is not responsible for any damages caused to your device or yourself due to the installation or use of this mount. Do not install Arkon® products near areas that interfere with operation of vehicles. Arkon® assumes no responsibility or liability for injury or death as a result of failure to install in a safe location. Arkon® is not responsible for any damages caused to vehicles, product, or people due to the installation or use of this product.


Continued on page 2



Based on your preferred base, please follow the steps outlined below.


3 Adjust the Height of the Mount

To modify the height and angle of the mount, simply loosen the ring and knob. Once you've achieved the desired position, retighten them to secure it in place.

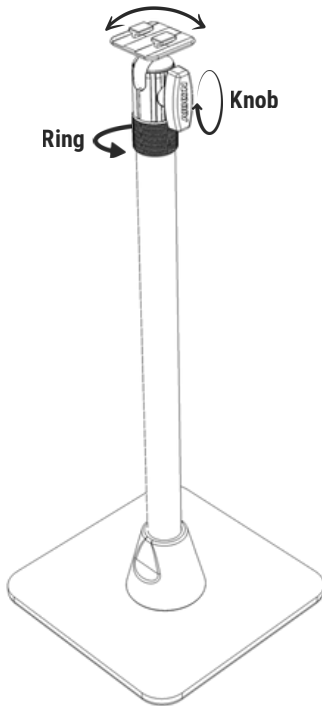


4 Dual T-Tab Adapter Installation

First locate the Dual-T slot on the back of the holder. Align the adapter with the slot and insert it carefully. Once inserted, slide the adapter upward until it is fully secured in place.

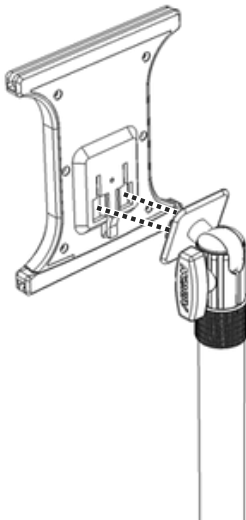


3 Install the Pole in the Clamp Base

Place the pole in the clamp base by utilizing the alley key included with the weighted base and turn it clockwise to secure it in place.

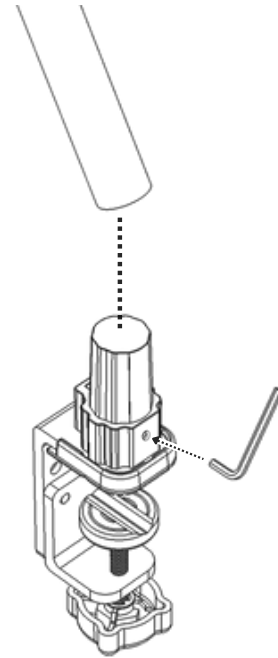

4 Attaching and Adjusting the Adapter on the Pole

Loosen the knob to insert the 20mm ball adapter onto the pole, then retighten for a secure fit. To adjust the height and angle of the mount, loosen the ring and knob, position it as desired, and retighten to lock it in place.

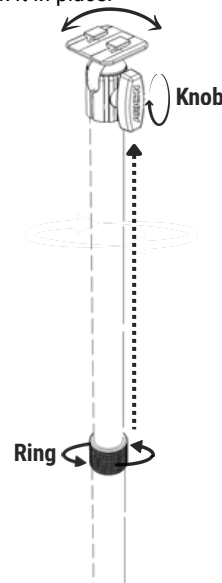

WARNING

CHOKING HAZARD - Keep out of reach from children under 8 yrs. as they can choke or suffocate on parts included with this system

WARNING


Arkon® is not responsible for any damages caused to your device or yourself due to the installation or use of this mount. Do not install Arkon® products near areas that interfere with operation of vehicles. Arkon® assumes no responsibility or liability for injury or death as a result of failure to install in a safe location. Arkon® is not responsible for any damages caused to vehicles, product, or people due to the installation or use of this product.

Continued on page 3




5 Attach the Adapters to the Clamps

Position the tightening ring over the 22mm ball on the clamp mount. Insert the Dual-T adapter into the clamp mount. Secure the connection by tightening the ring in place.

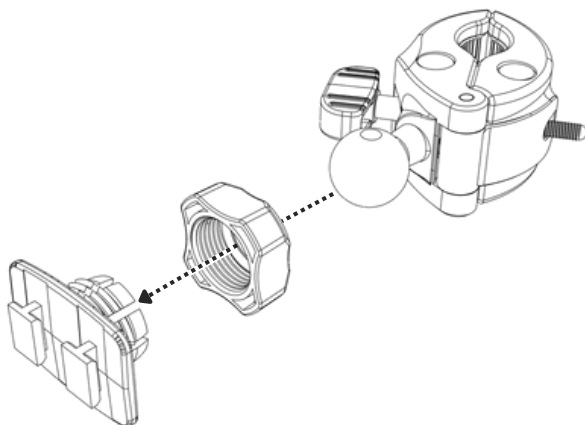


6 Dual T-Tab Adapter Installation

First locate the Dual-T slot on the back of the holder. Align the adapter with the slot and insert it carefully. Once inserted, slide the adapter upward until it is fully secured in place.

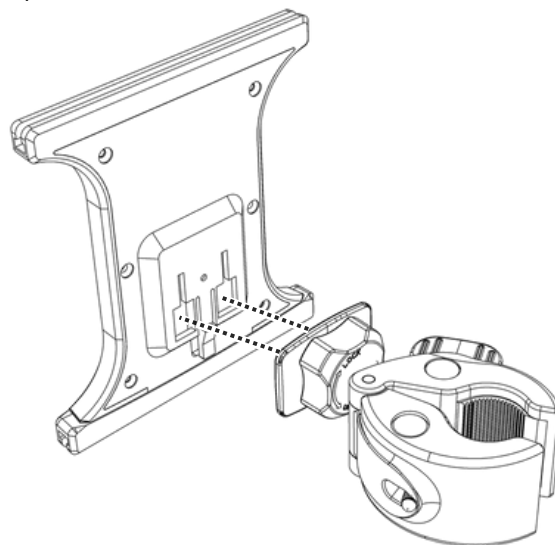

7 Installing the Clamp Mount onto the Full Assembly

Turn the knob counterclockwise to loosen the clamp. Slide it onto the pole at your desired position, then turn the knob clockwise to securely tighten it in place.

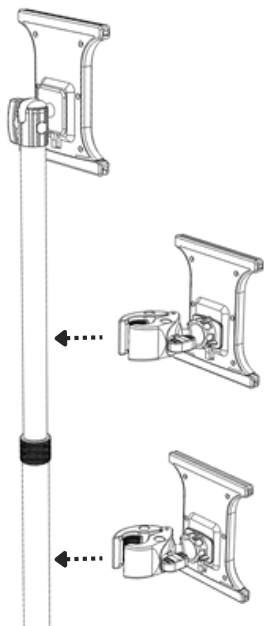

WARNING

CHOKING HAZARD - Keep out of reach from children under 8 yrs. as they can choke or suffocate on parts included with this system

WARNING

Arkon® is not responsible for any damages caused to your device or yourself due to the installation or use of this mount. Do not install Arkon® products near areas that interfere with operation of vehicles. Arkon® assumes no responsibility or liability for injury or death as a result of failure to install in a safe location. Arkon® is not responsible for any damages caused to vehicles, product, or people due to the installation or use of this product.


Continued on page 4



Tablet Holder Installation Steps:


8 Installing the Support Legs

Select the appropriate support legs based on the size guidelines provided on page 1. Then, insert each leg into the designated support leg channel on the holder and slide it in until it fits securely.

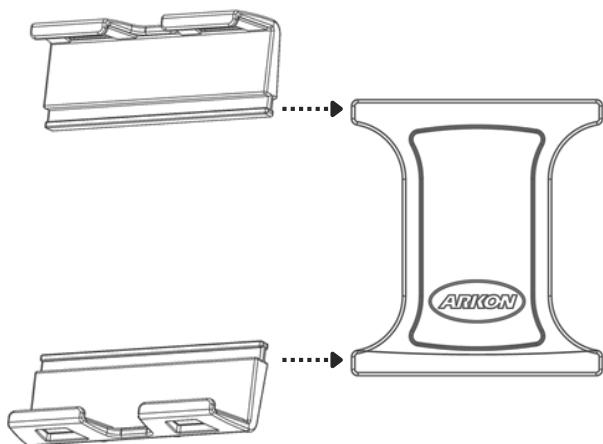

9 Extend the Spring-Load Mechanism

To extend the legs, insert one end of the tablet into the bottom support legs.

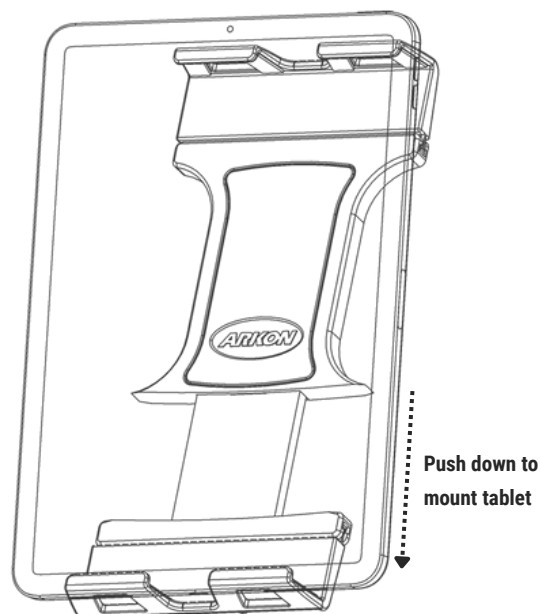


10 Install Your Tablet

With the holder's spring-loaded support legs expanded, lay the tablet flat on the holder.



11 Secure Your Tablet

Gently release the tablet into the holder, allowing the bottom spring-loaded support legs to secure the tablet.

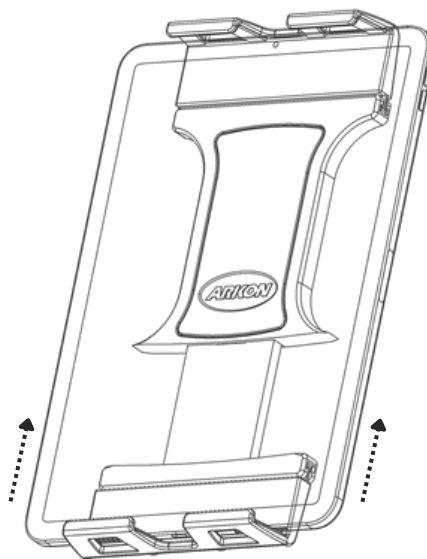

WARNING

CHOKING HAZARD - Keep out of reach from children under 8 yrs. as they can choke or suffocate on parts included with this system

WARNING

Arkon® is not responsible for any damages caused to your device or yourself due to the installation or use of this mount. Do not install Arkon® products near areas that interfere with operation of vehicles. Arkon® assumes no responsibility or liability for injury or death as a result of failure to install in a safe location. Arkon® is not responsible for any damages caused to vehicles, product, or people due to the installation or use of this product.

