

Includes:

- 1 - RoadVise® XL Holder with Tightening Ring (RVXLWR)
- 1 - 25mm Ball to 17mm Ball Adapter (SP25MM17)
- 1 - Robust™ Series 3.75 inch Shaft Arm (SP-RM250)
- 1 - Seat Rail Floor Pedestal with 25mm Ball (RMH08825MM)

Important: Clean the application surface and make sure it is free of dirt, dust, and grease before installation.

Compatibility: This holder is suitable for smartphones and tablet with cases measuring up to 5" wide.




Seat Rail Kit Hardware Specifications:

- 1 - Metal conduit (SPCONDUIT)
- 1 - Floor mounting bracket
- 4 - Phillips rounded heads screws (18-8 Stainless Steel, M4.2 Screw Size 25mm Long)

1

Option 1 - Mounting the Passenger Seat Bolt



Utilize a socket wrench to loosen the bolt on the passenger seat track. Then, insert the seat track bolt bracket. Finally, tighten the seat track bolt securely.

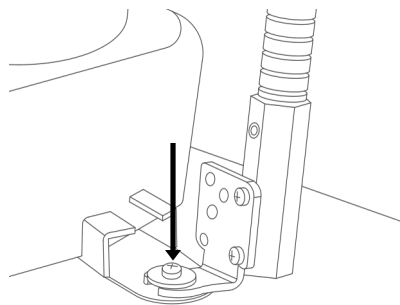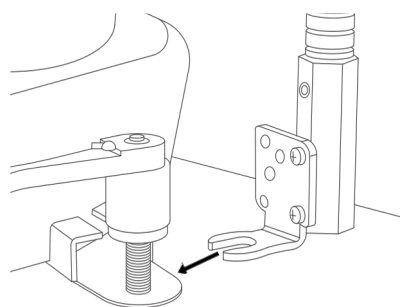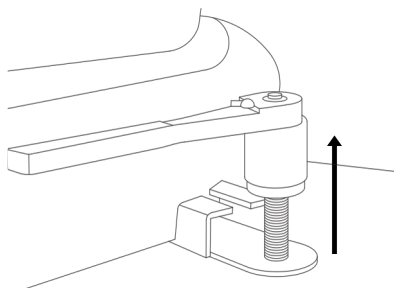

2

Option 2 - Floor Mounting

Fasten the floor bracket to the mount. (Adjust the bracket's orientation as needed for your vehicle). Secure the floor/console bracket in place using screws.

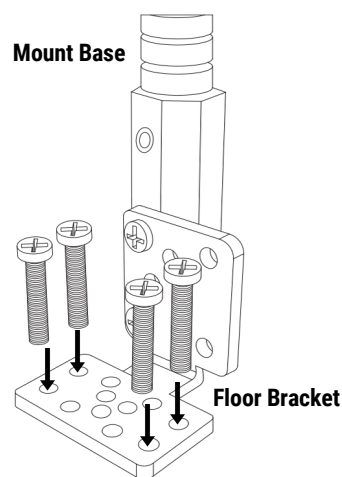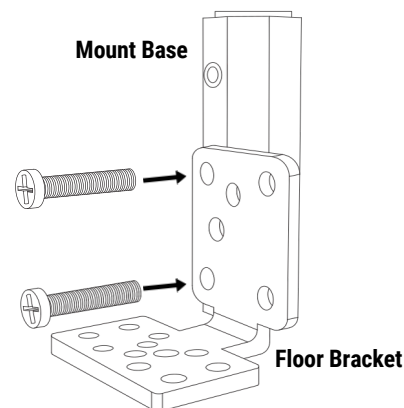

WARNING

CHOKING HAZARD - Keep out of reach from children under 8 yrs. as they can choke or suffocate on parts included with this system

WARNING

Arkon® is not responsible for any damages caused to your device or yourself due to the installation or use of this mount. Do not install Arkon® products near areas that interfere with operation of vehicles. Arkon® assumes no responsibility or liability for injury or death as a result of failure to install in a safe location. Arkon® is not responsible for any damages caused to vehicles, product, or people due to the installation or use of this product.


Continued on page 2



3

Attach the 17mm ball adapter to the device holder


Unscrew the tightening ring from the device holder in a counterclockwise direction. Slide the tightening ring over the 17mm ball and insert the ball into the back of the device holder. Tighten the ring back to ensure a secure connection.

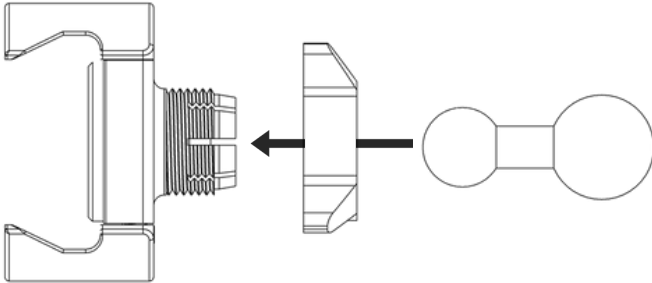

4

Assemble the components


Locate the shaft arm and turn to the adjustment knob counterclockwise to expand. Insert the 25mm ball ends into the shaft. Turn clockwise to tighten.

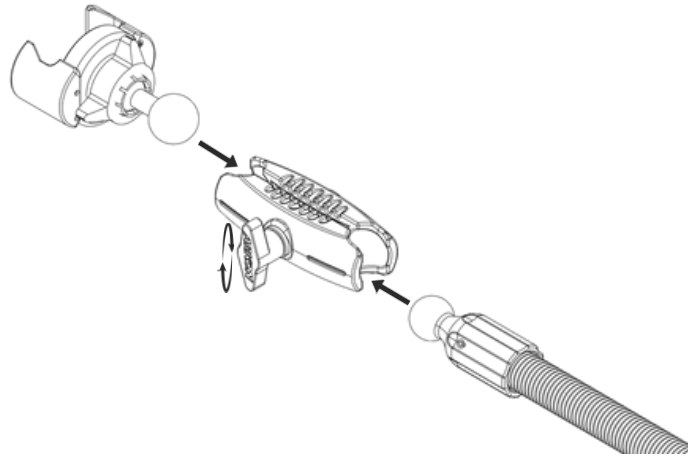

5

Install your device into the holder


Place your device into the holder by pushing it into one of the spring-loaded arms. Expand the other arm to fully insert your device. Expand one arm, to remove device.

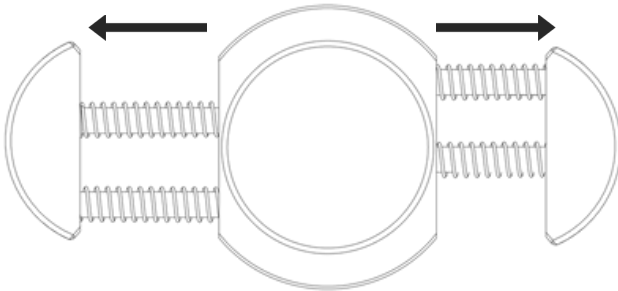

6

Optional Step: Metal Conduit

Attach the included metal conduit to the console to help minimize vibration.

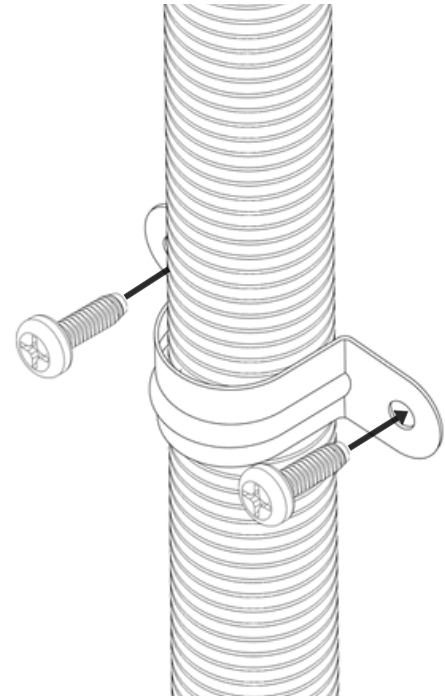

WARNING

CHOKING HAZARD - Keep out of reach from children under 8 yrs. as they can choke or suffocate on parts included with this system

WARNING

Arkon® is not responsible for any damages caused to your device or yourself due to the installation or use of this mount. Do not install Arkon® products near areas that interfere with operation of vehicles. Arkon® assumes no responsibility or liability for injury or death as a result of failure to install in a safe location. Arkon® is not responsible for any damages caused to vehicles, product, or people due to the installation or use of this product.

