


TAB004KL-B | Universal Locking Adjustable Aluminum Metal Tablet Holder



1


To size the tablet holder to your tablet, begin by unlocking the top of the tablet holder with the key and push up on the locking arm.





3

Unscrew the screws at the bottom sides of the holder to adjust the tablet holder's width to the tablet. Tighten to secure.



Includes:


- **1** Universal Metal Locking Tablet Holder (TAB004KL)
- 1 Large Robust Shaft Knob (SPRMLGKNOBNL)

Device Compatibility: Fits 7"-10" screen size tablets

Tools Needed: 7mm and 10mm socket wrenches


Mounting pedestals sold separately.


2 Unscrew the three screws/washers at the back/center of the holder to adjust the tablet holder's height to the tablet (not included). Retighten the screws/washers to secure.



Λ	_	

To lock down tablet, close down on the locking arm on the top of the tablet. Align the security slot on both the locking arm and upper bracket. Use the included key to lock the tablet in place.





WARNING

CHOKING HAZARD - Keep out of reach from children under 8 yrs. as they can choke or suffocate on parts included with this system.

WARNING

Arkon[®] is not responsible for any damages caused to your device or yourself due to the installation or use of this mount. Do not install Arkon[®] products near areas that intefere with operation of vehicles. Arkon[®] assumes no responsibility or liability for injury or death as a result of failure to install in a safe location. Arkon[®] is not responsible for any damages caused to vehicles, product, or people due to the installation or use of this product.




USA (800) 841-0884 INT'L (626) 254-9005 Monday - Friday 9 am - 5 pm PST arkon.com Designed in USA © Arkon Resources, Inc. Need assistance? Scan to email our Arkon[®] customer service team.




To convert the metal locking tablet holder to a NON-LOCKING option:

1

Remove nut and washers from the center of the front of the holder that secures the position of the locking arm

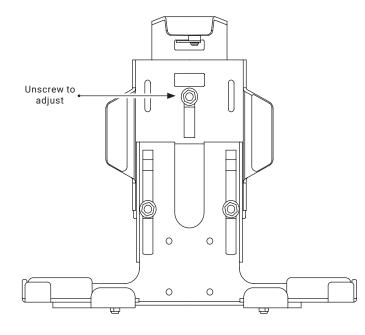


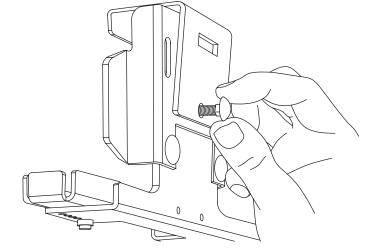

Pull screw out from the back of the locking arm


_	
4	

Attach knob to screw on the back of the holder's locking arm



Re-insert screw to the front of the holder going through the

locking arm



WARNING

CHOKING HAZARD - Keep out of reach from children under 8 yrs. as they can choke or suffocate on parts included with this system.

WARNING

Arkon[®] is not responsible for any damages caused to your device or yourself due to the installation or use of this mount. Do not install Arkon[®] products near areas that intefere with operation of vehicles. Arkon[®] assumes no responsibility or liability for injury or death as a result of failure to install in a safe location. Arkon[®] is not responsible for any damages caused to vehicles, product, or people due to the installation or use of this product.



USA (800) 841-0884 INT'L (626) 254-9005 Monday - Friday 9 am - 5 pm PST

arkon.com Designed in USA © Arkon Resources, Inc. Need assistance? Scan to email our Arkon[®] customer service team.

