


Includes:

- 1 – LockVise™ Metal Locking Tablet Holder Kit (TAB004KL)
- 1 – Metal 4-Hole AMPS to 25mm Ball Adapter (APMAMPS25MM)
- 1 – Robust™ Series 3.75 inch Shaft Arm (SP-RM250)
- 1 – Seat Rail Floor Mount Pedestal Kit (RMH08825MM)

Compatibility: This holder is designed to be compatible with a variety of tablets, covering popular models with width ranging from 8" to 10.25" and height from 4.37" to 7.75".


1 Install the AMPS Adapter Plate onto the tablet holder

Position the AMPS adapter at the back of the tablet holder. Insert the four mounting screws through the AMPS 4-hole ball adapter plate and into the tablet holder. Securely tighten the screws to complete the installation.

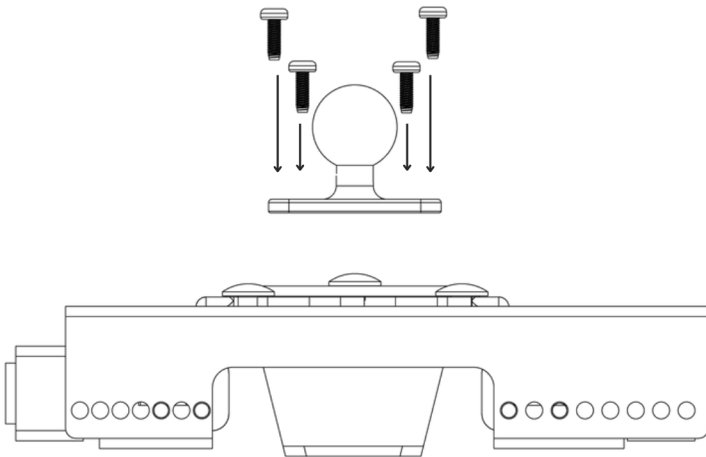

2 Assemble the components

Turn the shaft knob counterclockwise to loosen it. Next, attach the 25mm ball adapters to both ends. Finally, tighten the shaft to secure everything in place.

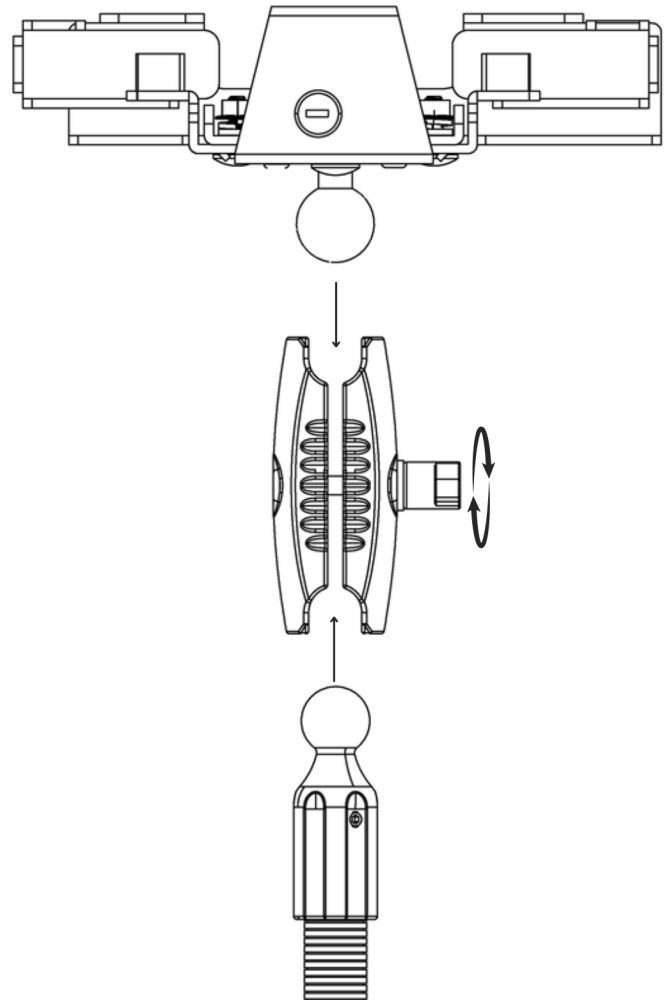

WARNING

CHOKING HAZARD - Keep out of reach from children under 8 yrs. as they can choke or suffocate on parts included with this system




WARNING

Arkon® is not responsible for any damages caused to your device or yourself due to the installation or use of this mount. Do not install Arkon® products near areas that interfere with operation of vehicles. Arkon® assumes no responsibility or liability for injury or death as a result of failure to install in a safe location. Arkon® is not responsible for any damages caused to vehicles, product, or people due to the installation or use of this product.

Continued on page 2



3 Option 1 - Mounting the Passenger Seat Bolt

Utilize a socket wrench to loosen the bolt on the passenger seat track. Then, insert the seat track bolt bracket. Finally, tighten the seat track bolt securely.

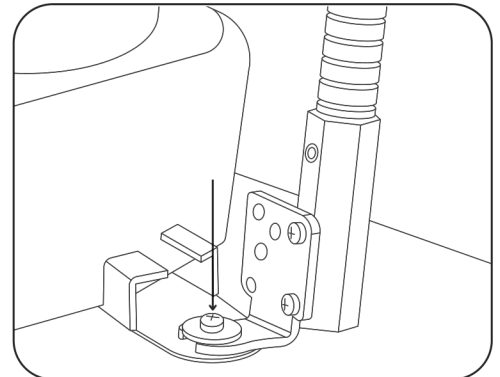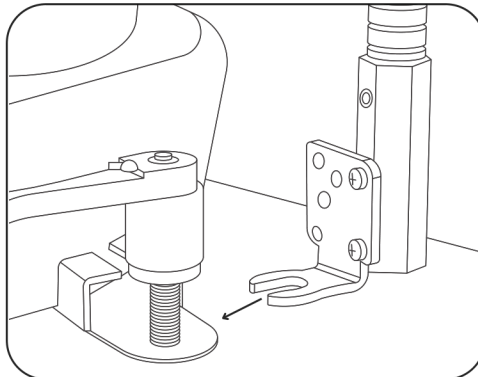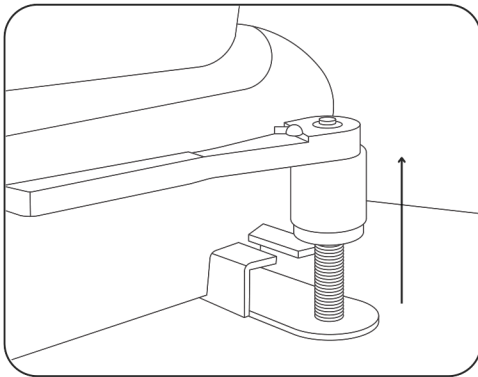


4 Option 2 - Floor Mounting

Fasten the floor bracket to the mount. (Adjust the bracket's orientation as needed for your vehicle). Secure the floor/console bracket in place using screws.

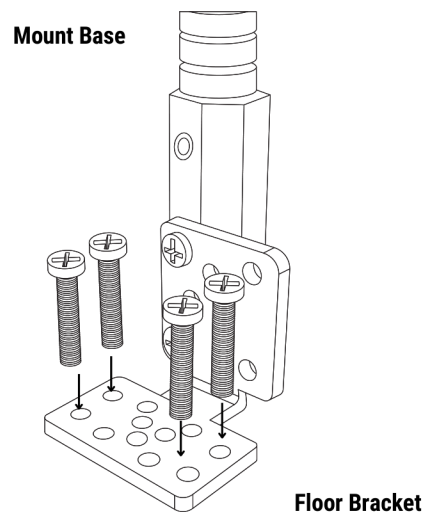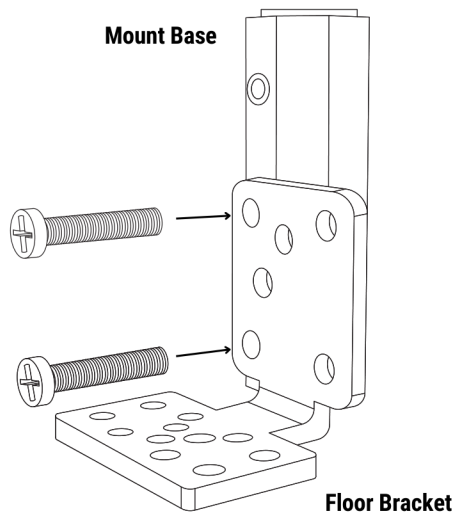

5 Optional Step: Metal Conduit

Connect the provided metal conduit to the console to reduce vibration.

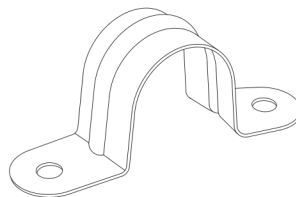

WARNING

CHOKING HAZARD - Keep out of reach from children under 8 yrs. as they can choke or suffocate on parts included with this system

WARNING

Arkon® is not responsible for any damages caused to your device or yourself due to the installation or use of this mount. Do not install Arkon® products near areas that interfere with operation of vehicles. Arkon® assumes no responsibility or liability for injury or death as a result of failure to install in a safe location. Arkon® is not responsible for any damages caused to vehicles, product, or people due to the installation or use of this product.


Continued on page 3



6

Modify the Tablet Holder Width


To customize the tablet holder width for your device, loosen the screws positioned at the bottom sides of the holder. After adjusting, tighten the screws to keep the tablet securely in place.

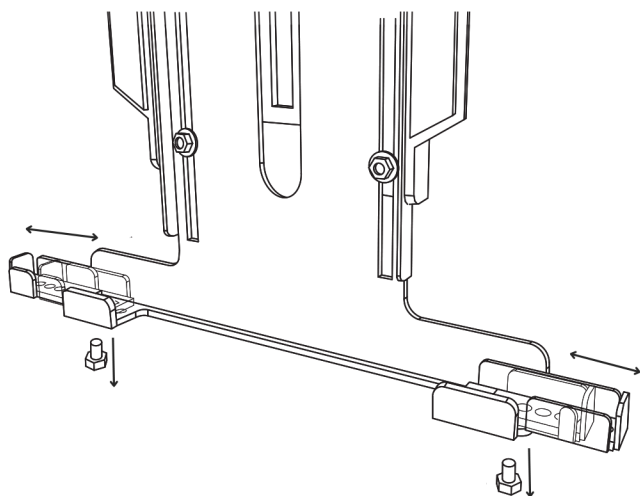

7

Adjusting the Tablet Holder Length


Unscrew the three screws/washers located at the back/center of the holder to modify the height of the tablet holder to match your tablet. Remember to retighten the screws/washers to ensure everything is securely in place.

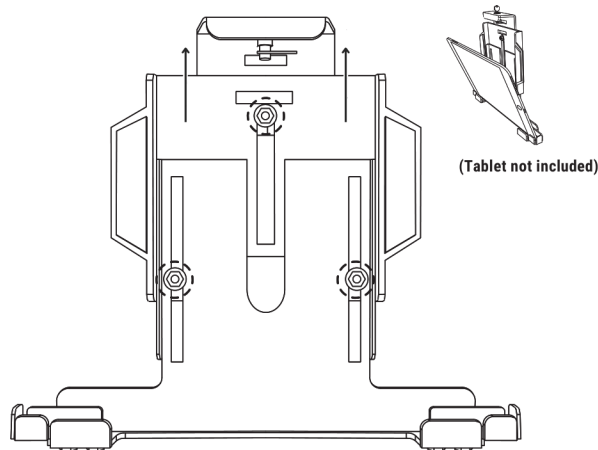

8

Securing the Tablet Holder


To secure the tablet, simply press down on the locking arm located on the top of the tablet and use the included key to lock it in place.

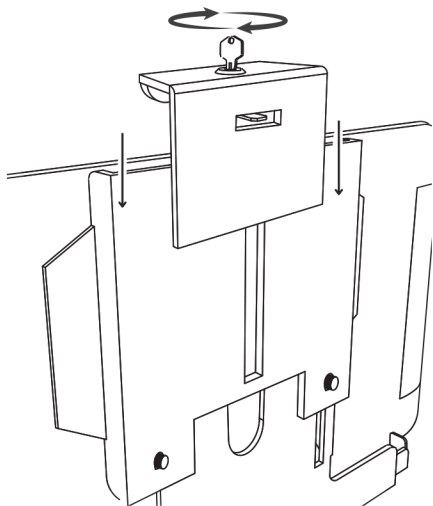

9

Optional - Installing the foam padding if not using a tablet case

To properly set up the tablet holder, apply the foam padding and place it in the sides of the holder.

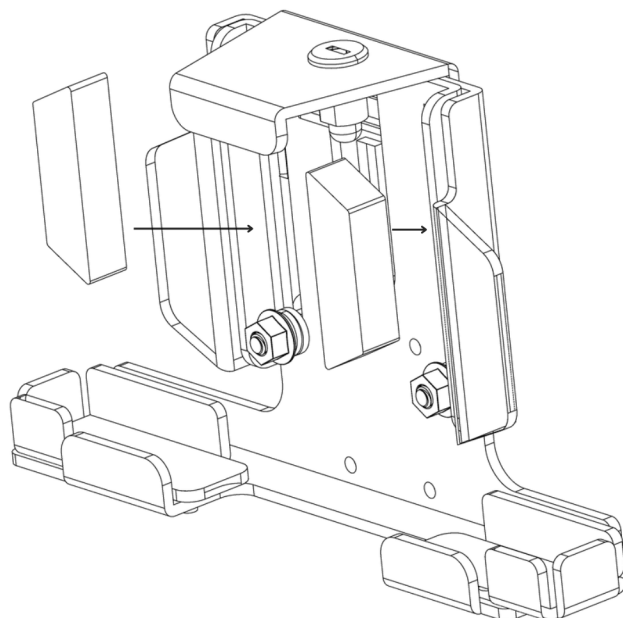

WARNING

CHOKING HAZARD - Keep out of reach from children under 8 yrs. as they can choke or suffocate on parts included with this system

WARNING

Arkon® is not responsible for any damages caused to your device or yourself due to the installation or use of this mount. Do not install Arkon® products near areas that interfere with operation of vehicles. Arkon® assumes no responsibility or liability for injury or death as a result of failure to install in a safe location. Arkon® is not responsible for any damages caused to vehicles, product, or people due to the installation or use of this product.


Continued on page 4



10

Optional - Switch to Non-locking


Take off the nut and washers from the front center of the holder that locks the position of the locking arm.

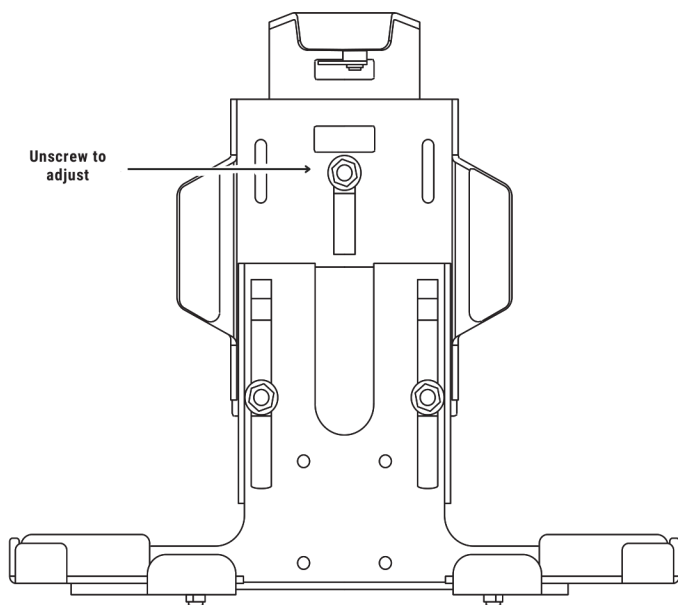

11

Switch to Non-locking


Pull screw out from the back of the locking arm

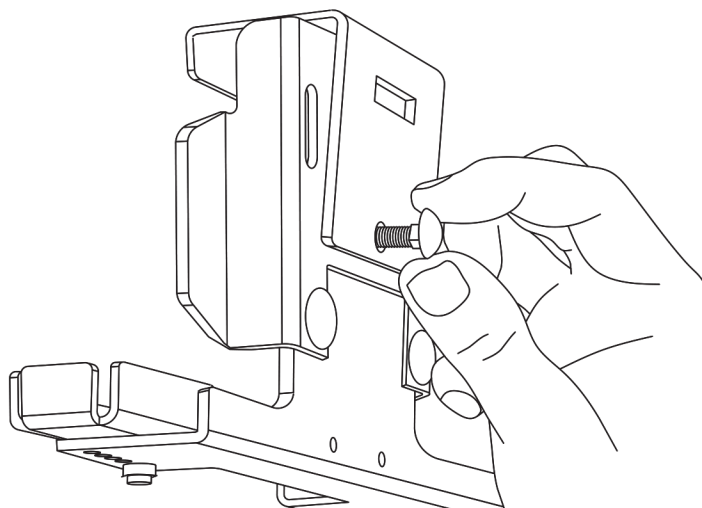

12

Switch to Non-locking


Re-insert screw to the front of the holder going through the locking arm

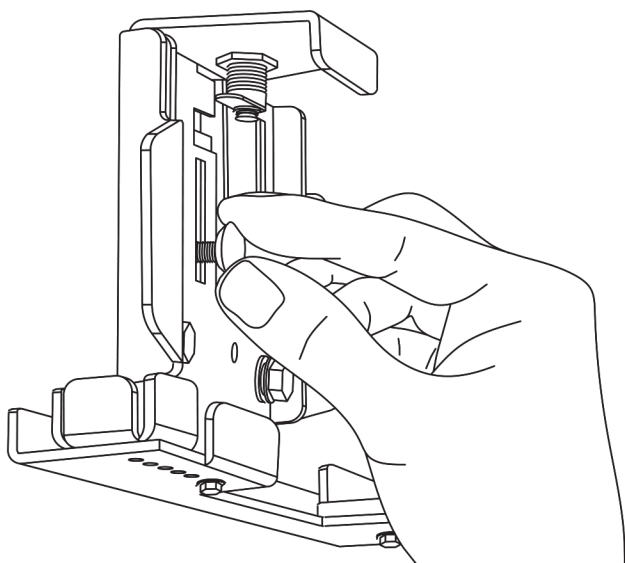

13

Switch to Non-locking

Attach knob to screw on the back of the holder's locking arm

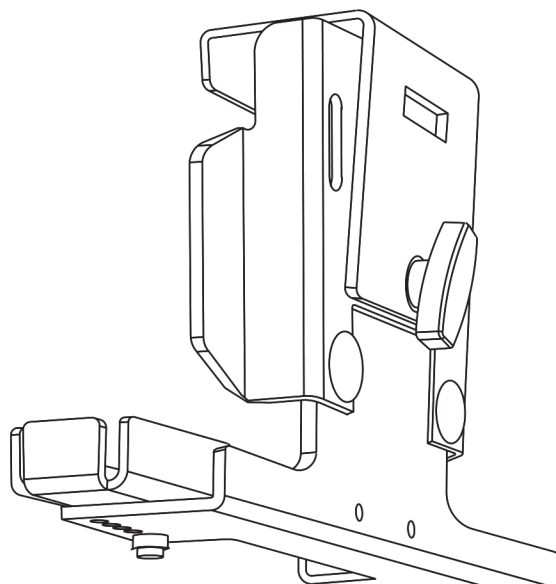

WARNING

CHOKING HAZARD - Keep out of reach from children under 8 yrs. as they can choke or suffocate on parts included with this system

WARNING

Arkon® is not responsible for any damages caused to your device or yourself due to the installation or use of this mount. Do not install Arkon® products near areas that interfere with operation of vehicles. Arkon® assumes no responsibility or liability for injury or death as a result of failure to install in a safe location. Arkon® is not responsible for any damages caused to vehicles, product, or people due to the installation or use of this product.

